

Iso-footcandle Lines of Horizontal Illumination


Catalog # **SHD1 PC1026 III - 175 MH**

Light Source 175w Metal Halide - Clear BD-17

Description Cast aluminum fitter,
Type 3 acrylic refractor

Lamp Lumens **14,000**

Mounting Height **12'**




SHD1 PC1026 III

Conversion Factors for Alternate Height and Lamps

| New Mounting Height | Conversion Factor |
|---------------------|-------------------|
| 8 ft. | 2.25 |
| 10 ft. | 1.44 |
| 14 ft. | .74 |

To apply a new mounting height, take the numbers in the graphical display and multiply by the conversion factor above. The grid spacing will now be the same as the new mounting height.

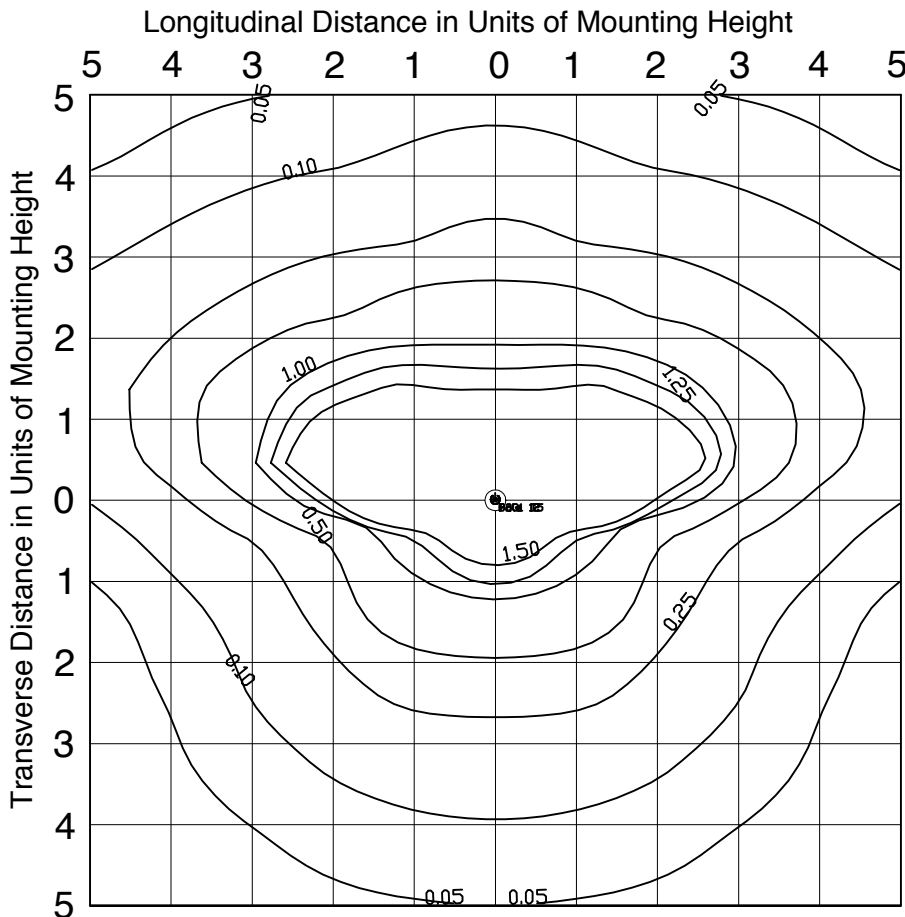

| Alternate Light Source | Conversion Factor |
|------------------------|-------------------|
| 70 HPS | .45 |
| 100 HPS | .67 |
| 150 HPS | 1.15 |
| 250 HPS | 2.15 |
| 70 MH | .36 |
| 100 MH | .60 |
| 250 MH | 1.46 |

To apply a light source, take the numbers in the graphical display and multiply by the conversion factor above.

Note: A new mounting height and alternate light source can both be applied at the same time.