

## Iso-footcandle Lines of Horizontal Illumination

Catalog # **SHD1 PC1026 V - 175 MH**


---

Light Source 175w Metal Halide - Clear BD-17

Description Cast aluminum fitter,  
Type V acrylic refractor

Lamp Lumens **14,000**

Mounting Height **12'**




**SHD1 PC1026 V**

### Conversion Factors for Alternate Height and Lamps

New Mounting Height	Conversion Factor
8 ft.	2.25
10 ft.	1.44
14 ft.	.74

To apply a new mounting height, take the numbers in the graphical display and multiply by the conversion factor above. The grid spacing will now be the same as the new mounting height.

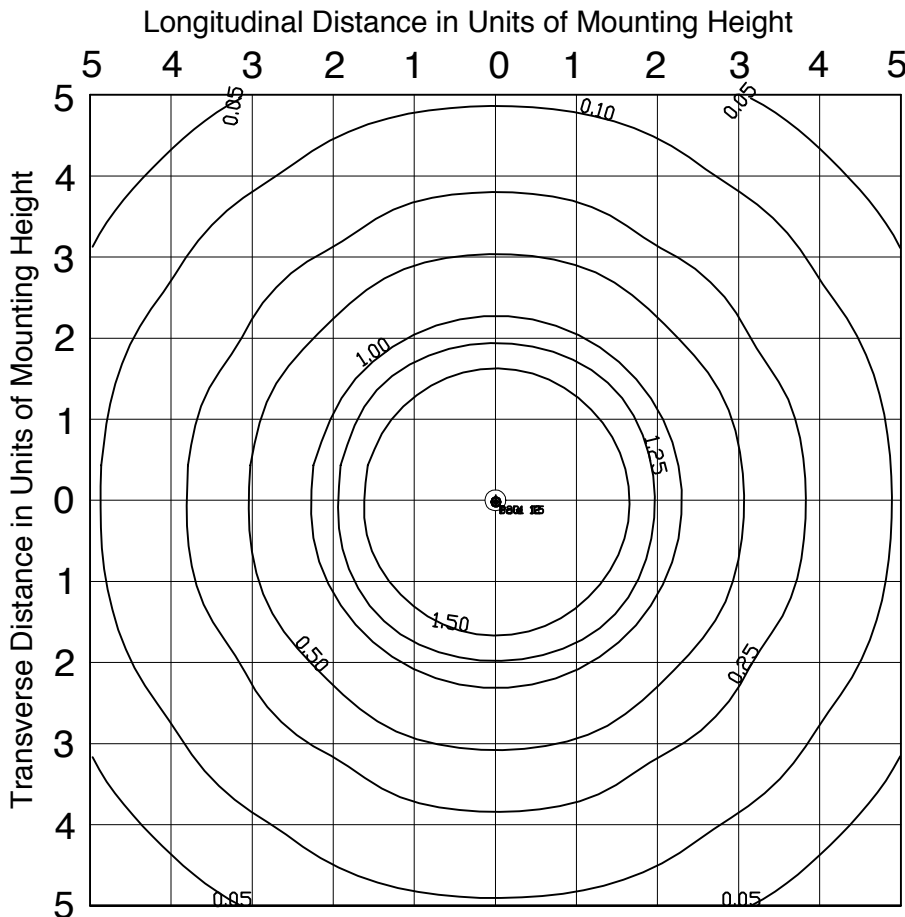

Alternate Light Source	Conversion Factor
70 HPS	.45
100 HPS	.67
150 HPS	1.15
250 HPS	2.15
70 MH	.36
100 MH	.60
250 MH	1.46

To apply a light source, take the numbers in the graphical display and multiply by the conversion factor above.

**Note:** A new mounting height and alternate light source can both be applied at the same time.